


POWDER COATED STEEL WELLHEAD ASSEMBLY

Save time making up wellheads for domestic borehole casings with Proquip's purpose-designed, all-steel wellheads, available off-the-shelf.

In contrast to PVC wellheads, the quality fabricated, mild steel construction provides robust protection against impact and is configured for much easier installation of surface fittings. The PVC casing with pump and rising mains locates readily into the wellhead's integral steel tube which bolts down to the well chamber or can be grouted in to form a strong, tidy seal. This means that loads from the pump and rising main are taken up by the wellhead assembly and not the PVC casing.

Powder coated for a pleasing, durable finish, the Proquip wellhead brings a neat, professional look befitting the borehole engineering below.

Available ex stock to suit casings up to 8". Outlet sizes from 1½" up to 3".

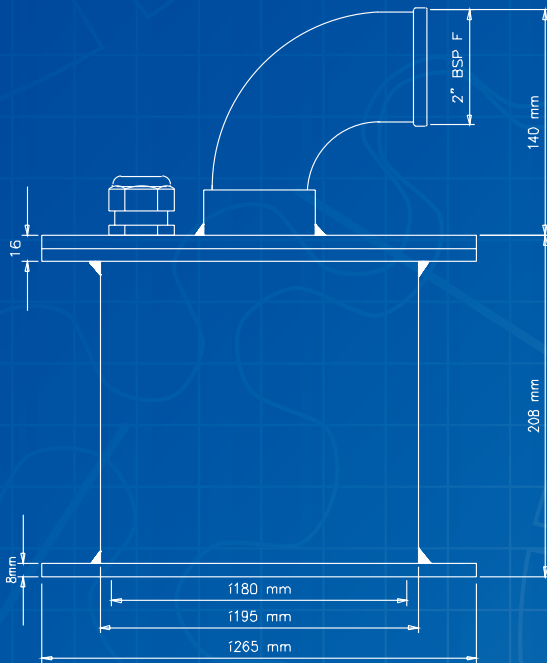

STANDARD SPECIFICATION

Base Materials: Powder coated Mild Steel
 Elbow Materials: Powder coated Ductile Iron
 Gland Probe Cable: 12mm ID
 Gland Materials: Polypropylene
 Vent / Dip tube port
 Gasket: Rubber

OPTIONS

Pressure Gauge
 Sample Tap
 Air Valve
 Non Return Valve
 Partial / complete stainless steel
 Custom Fabrication

SIZE	A	B	C	D	E	WELL CASING DIA.	RM SIZE	GLAND ID	WEIGHT
1½"	265	180	208	310	350	175 OD	1½"	17	20kg
2"	265	180	208	310	350	175 OD	2"	17	20kg
3"	340	222	270	440	495	220 OD	3"	20	35kg

All dimensions in mm unless otherwise shown

Supplied by
Proquip Direct Ltd
 Park Road Works • 125 Park Road • Beckenham • Kent BR3 1QJ
 T 020 8639 0377 F 020 8639 0379 E sales@proquipdirect.com
www.proquipdirect.com



proquip
 DIRECT LTD