



STEEL WELL HEADS


STANDARD SPECIFICATION

Body and Headplate: Mild Steel
 90 Deg Elbow : Ductile Iron
 Gland Power Cable: 20mm ID
 Gland Probe Cable: 12mm ID
 Gland Materials: Polypropylene
 Bolts M10 x 30: Nickel Plated
 Gasket: Rubber
 Weight: 12kg
 Dimensions: Dia 265 H 345
 Casing Diameter: 175 mm OD Max
 Rising Main size : 2" Max

Suitable for grouting or bolting

OPTIONS

Dip tube sockets
 Inspection Ports
 Pressure Gauge
 Sample Tap
 Air Valve
 Flow Meter
 Non Return Valve
 SS Bolts
 WRAS approved Coating
 WRAS approved Gasket
 2" x 1.5" Reducing Bush
 316 or 304 Well Heads
 PVC Well Heads
 Custom Fabrication

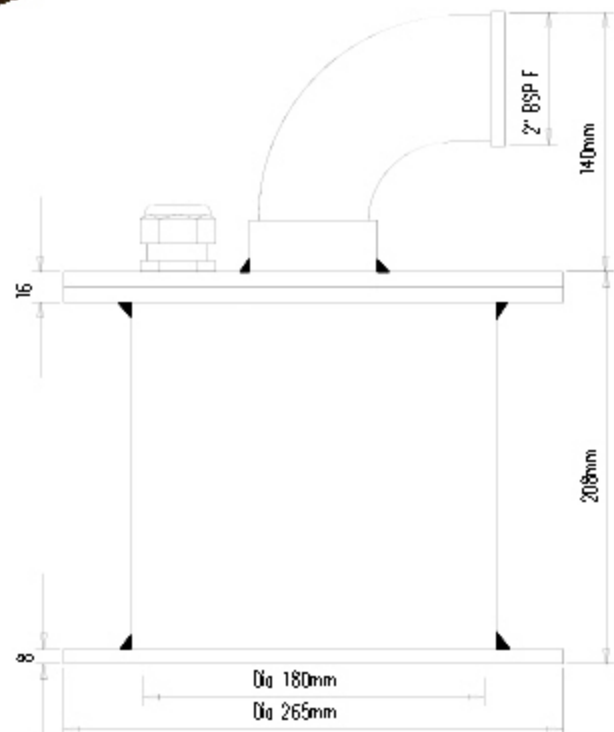

SUPPLIED BY

Proquip Direct Limited, Park Road Works, 125 Park Road Beckenham Kent BR3 1QJ
 Tel: 020 8639 0377/8 Fax: 020 8639 0379
 www.proquipdirect.com Email: sales@proquipdirect.com